



Waterproof solutions Watertight guarantee

Part of the DBGroup

PUDLO CD PUMP

DESCRIPTION

The PUDLO CD Pump is a fully automatic waste water pumping station suitable for pumping ground water from a cavity membrane system and/or surface water from lightwells to a higher level.

The systems are suitable for installing either at the initial building stage or retro fitting to existing buildings.

The systems consist of a polyethylene tank with twin automatic waste water submersible pumps, high pressure internal pipework and fittings, non-return valves, access cover (solid top, sealed, locking) and AquaSafe Alarm.

INSTALLATION

- ✓ Below ground
- ✓ New build
- ✓ Retro-fit

APPLICATION

- ✓ Domestic
- ✓ Commercial

POWER SUPPLY

- ✓ Single phase

ACCESS COVER

- ✓ Solid top, sealed, locking

NO. OF PUMPS

- ✓ Two

INTERNAL PIPEWORK

- ✓ High pressure plastic

CONTROLS

- ✓ AquaSafe Alarm



MODELS

PUDLO CD Pump

50–100 litre storage capacity (depending on inlet level).

CHAMBER DIMENSIONS

Model	Diameter	Height
PUDLO CD Pump	600mm	600mm


CONTROL PANEL DIMENSIONS

Model	Length	Width	Depth
AquaSafe	122mm	124mm	85mm

WEIGHT

PUDLO CD Pump	15kg
---------------	------

PUMP CURVE

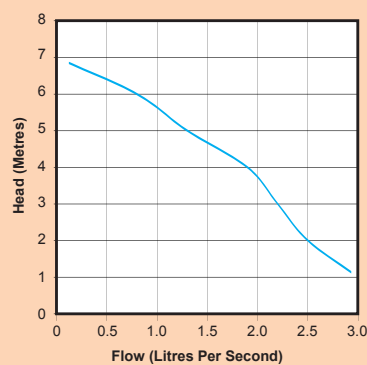

TECHNICAL SPECIFICATIONS

Power supply	230V AC
Rated current	1.9A
Motor rating	180W
Frequency	50Hz
Revolutions per minute	2800rpm
Max. head	6.8m
Max. flow rate	2.9 l/s
Max. liquid temp.	<40°C
Discharge size	1¼"
Cable Length	5m
Colour	White

ACCESSORIES



Additional inlets



Monitoring system



Battery backup



Spare pump



External gate valve

FOR MORE INFORMATION

TEL: +44 01954 780687 | EMAIL: sales@pudlo.com | WEB: www.pudlo.com

TECHNICAL SUPPORT

TEL: +44 01442 211554